



Wireless Humidity Sensor US



The Wireless Humidity Sensor measures the surrounding humidity and temperature, and wirelessly transmits the result to a Cloud Connector (Gateway) via SecureDataShot™ technology. The Cloud Connector will relay the temperature and relative humidity readings to a Cloud service. The readings are performed at 15 minute intervals. The Wireless Humidity Sensor has touch functionality for simple installation and use.

Features

- 1 % RH resolution, ± 4.5 %RH absolute accuracy at 77 °F between 20 and 80 %RH
- 0.1 °F resolution, ± 0.7 °F absolute accuracy at 77 °F
- Touch functionality
- Long lifetime, up to 10 years in default configuration and standard environment
- Robust design
- Wireless range 25 m typical indoor, similar to a WiFi network with an advanced WiFi router
- Wireless range line of sight up to 300 m in standard mode and up to 1000 m in high power Boost Mode

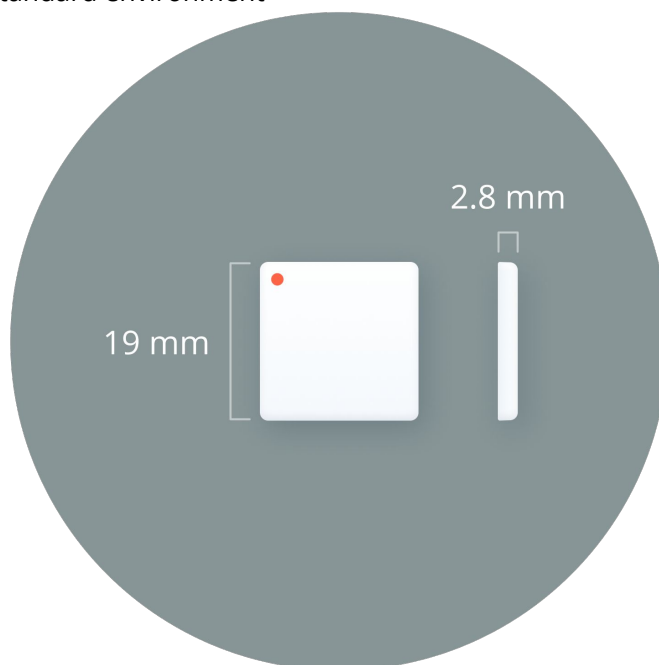

Specifications

Operating Conditions	
Temperature range	-40 to 85 °C / -40 to 185 °F
Recommended temp. range ⁽¹⁾	0 to 50 °C / 32 to 122 °F non condensing
Humidity at 25 °C / 77 °F	0 to 100% relative humidity
Recommended Storage Conditions	Cool and dry, near normal room temperature
Construction Material	Sealed, IP68. Impact modified acrylic film
Typical Dimensions ⁽³⁾	19 x 19 x 2.8 mm (±0.2 mm)
Typical Weight ⁽³⁾	2.0 g (±0.3 g)
Lifetime	Up to 10 years ⁽¹⁾
Certifications and Compliance	Certified to FCC and ISED regulations FCC ID: 2ATFX-100541 IC: 25087-100541
Radio range	
Standard Mode	25 m indoor ⁽²⁾ , up to 300 m free-space ⁽²⁾
High Power Boost Mode	Up to 1000 m free-space ⁽²⁾
Wireless Communication	915 MHz ISM band, SecureDataShot™
Temperature resolution	0.1 °F resolution, ±0.7 °F absolute accuracy at 77 °F
Relative humidity resolution	1 %RH resolution, ±4.5 %RH absolute accuracy at 77 °F between 20 and 80 %RH

Sensor performance parameters

The Wireless Temperature Sensor performance is temperature dependent. The sensor battery will have reduced current drive capabilities at low temperatures resulting in increased recovery time and reduced range in Boost Mode. Self discharge of the battery will reduce the lifetime significantly at high temperatures.

Temperature dependency	-40 °F	-13 °F	32 °F	77 °F	122 °F	185 °F
Sensor lifetime recommended temperature range ⁽¹⁾		4 y	7 y	10 y	5 y	
Sensor lifetime full temperature range	1 w ⁽³⁾ / 3 y					4 mo
Typical communication recovery time (fresh battery)	1 min			0.5 s		
Absolute temperature accuracy (maximum)		±1.8 °F	±0.9 °F	±0.7 °F	±0.7 °F	±1.6 °F
Humidity dependency			0 %RH	20 %RH	80% RH	100 %RH
Absolute relative humidity accuracy (maximum)			±7.5 %RH	±4.5 %RH	±4.5 %RH	±7.5 %RH

Water: The Sensor is waterproof, but should not be used in applications where the sensor is submerged. Long time exposure to water will result in water penetration and reduced sensor lifetime.

Magnetism, electric fields: The sensor shall not be exposed to strong magnetic fields. Magnets should not be used for mounting the sensor, as this will make the sensor unresponsive. Strong electric field fluctuations (e.g. fluorescent lamps and switching transformers) may trigger false touch events.

Environmental factors: The sensor is designed to handle heavy stress, but exposure to environmental factors such as strong sunlight, mechanical stress, solvents and extensive temperature variations will impact lifetime.

Footnotes

(1): Assuming a radio transaction every 15 minutes, operating at room temperature in default configuration. Lifetime will vary based on operating environment and rate of transmissions.

(2): Based on standard ITU-R P.1238 (indoor) and ITU-R P.525 (free-space). Lifetime in Boost Mode is shorter than in Standard Mode.

(3): The backside tape is excluded

Disclaimer: The right is reserved to make changes at any time. Disruptive Technologies Research AS, including its affiliates, agents, employees, and all persons acting on its or their behalf, disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. All parameters in datasheet are expected performance and not guaranteed min or max performance.

