

Cloud Connector EU (Ethernet only)




The Cloud Connector connects the whole range of SecureDataShot™ enabled Sensors to the Cloud through an Ethernet connection. There is no need for configuration during installation. The Cloud Connector will transparently relay traffic between all Sensors in range and the Cloud without the need of any user configuration or intervention. The Cloud Connector has a built in power plug that needs to be connected to mains power.

Features

- Handles all SDS Sensors within range
- Seamless roaming for increased coverage
- Robust design
- Simple user interaction
- High performance radio interface for optimum range

Advantages

- Simple installation in power socket
- Maintenance free
- Low total cost of ownership

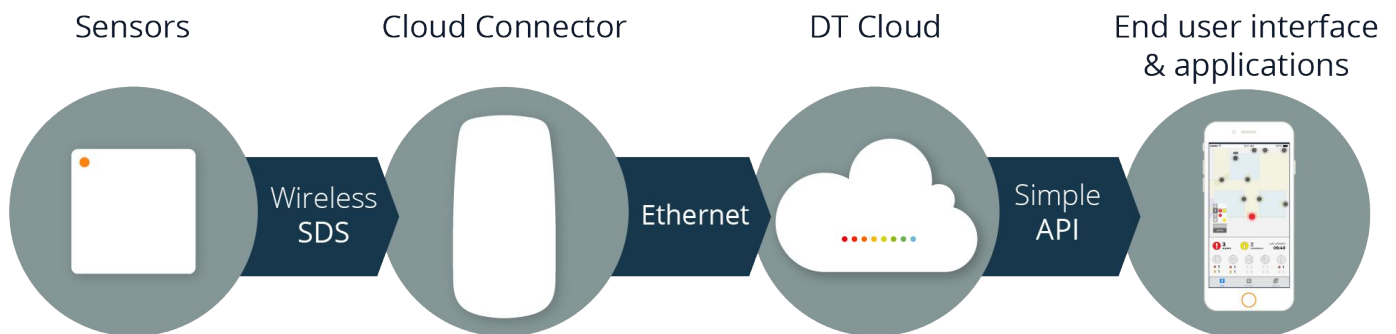

Specifications

Operating Conditions	
Temperature	0 to 45 °C
Humidity	10 to 90 % relative humidity, non-condensing

Storage Conditions	
Temperature	0 to 70 °C
Humidity	10 to 90 % relative humidity, non-condensing

Ingress protection	IP20
--------------------	------

Dimensions, weight	130 x 65 x 40 mm, 200 g
--------------------	-------------------------

Power supply	230 V AC, 75 mA, 50 Hz. Power plug: Europlug type C
--------------	---

Power consumption	Average < 3 W (2 W typical)
-------------------	-----------------------------

Certifications and Compliance	CE, WEEE
-------------------------------	----------

Frequency	Sensor interface, EU: 868 MHz SRD/ISM band, SecureDataShot™ Transmit Power < 80 mW
-----------	---

Interfaces	100Base-T - RJ45
------------	------------------
