
DISRUPTIVE
TECHNOLOGIES

Product Datasheet

Cloud Connector



Overview

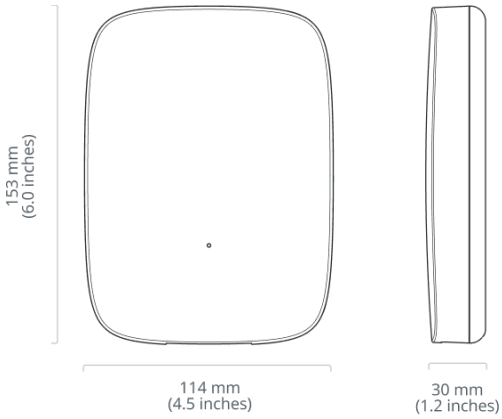

Description

Cloud Connectors relay data from wireless sensors that communicate over the SecureDataShot™ wireless protocol to the cloud via cellular or ethernet connectivity. From the cloud, the data can be integrated into other services using REST APIs and webhooks or viewed directly in Studio (web application).

Features

- No setup or configuration
- Supports up to 10,000 sensors
- Automatic software updates
- Built-in SIM card with a cellular roaming agreement
- Automatically connects to cellular network

Specifications

Radio & Communication

Communication Protocol	SecureDataShot™
Radio Frequency	868 MHz / 915 MHz / 920 MHz
Radio Range	See sensors for details

Cellular Connectivity (optional)

Technology	4G/LTE (CAT1 / CAT M1)
Roaming	Europe & North America
Sim Card	Internal eSIM

Power Supply

Plug Type	Barrel Jack
Voltage	5V DC
PoE Support	PoE Splitter

Mechanical Properties

Size	153x114x30 mm / 6x4.5x1.2 in
Weight	200 grams / 7 oz
PR Rating	IP20
Mounting Method	Screws

Product Name	Region	Product Number
Cloud Connector EU - Cellular	Europe	102505
Cloud Connector US - Cellular	North America	102506
Cloud Connector EU - Ethernet Only	Europe	102673
Cloud Connector US - Ethernet Only	North America	102644
Cloud Connector APAC - Ethernet Only	Australia, New Zealand, Singapore	103059

Order codes and purchasing information are maintained in the product catalog. Reach out to DT Sales representative for current SKUs and ordering details.

Disruptive Technologies Research AS © 2026

How it works

The Cloud Connector is a gateway that relays data from wireless sensors that communicate using the SecureDataShot™ protocol to a cloud service via cellular or ethernet connectivity. Simply plug in power and start collecting data from wireless sensors. The cellular version ships with an internal SIM card that allows it to automatically roam between cellular networks without any configuration required by the user.

Excellent wireless coverage

The Cloud Connector is designed to cover a large area within a building.

Sensor roaming


Wireless sensors can roam freely between Cloud Connectors.


Supports up to 10,000 sensors

A single Cloud Connector can relay data from thousands of sensors at the same time.

4G/LTE Support

Cellular enabled Cloud Connectors automatically connect and roam between cellular networks.

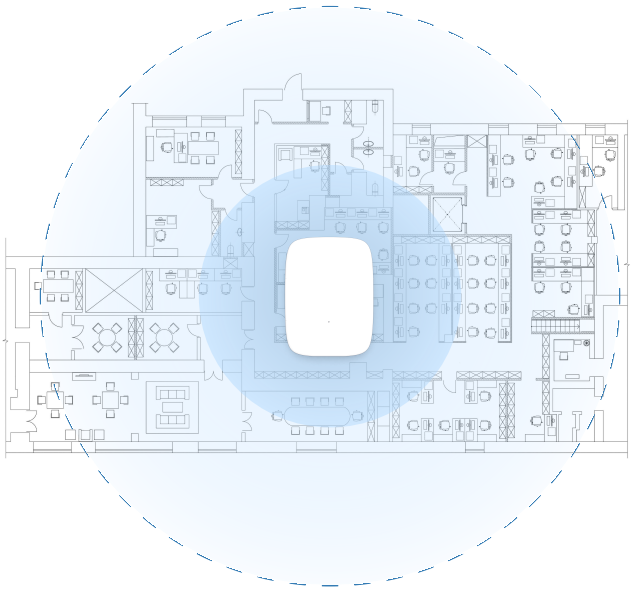

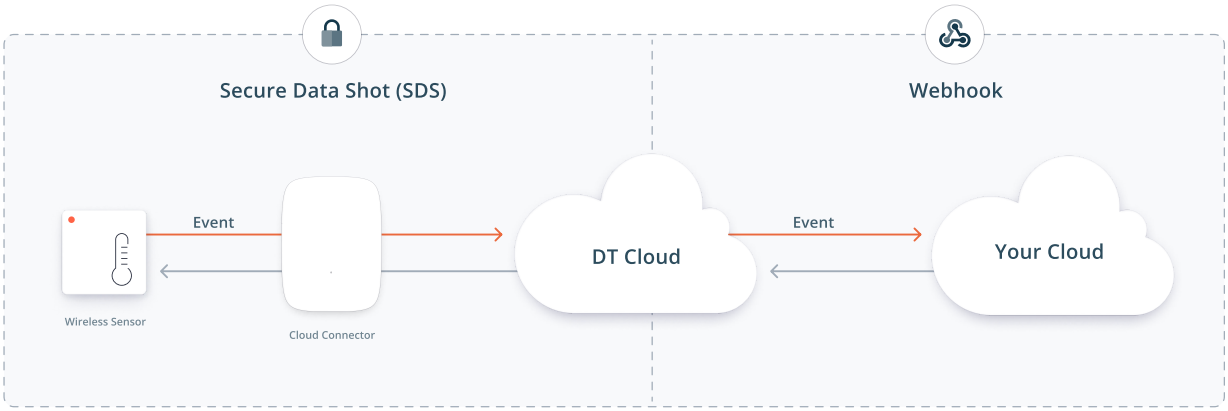

Wireless Sensors

Wireless sensors instantly connect and send data to the cloud via SecureDataShot™

Cloud Connectors

Cloud Connectors automatically connect and relay data to the cloud service

Cloud Service

No servers, databases, or on-prem clients to manage - simply install sensors and integrate the data into your own service.

Disruptive Technologies Research AS © 2026

Wireless Sensor Communication


Sensors from Disruptive Technologies communicate using SecureDataShot™ on sub GHz ISM band, a wireless communication protocol specifically designed to make reliable wireless sensors that are easy to use while maintaining the highest security possible without compromising the user experience.

Unlike traditional wireless sensor systems, with SecureDataShot™, there is no concept of pairing or commissioning devices onto the network. The sensors automatically send data through any SecureDataShot™ enabled gateway and can securely roam between gateways. Secure roaming reduces installation time and increases reliability because there is no way for sensors to disconnect from a gateway or the network. In addition, it lets each gateway communicate with thousands of sensors simultaneously.

Secure by default with SecureDataShot™

SecureDataShot™ creates a secure communication channel between the sensor and the cloud instead of between the sensor and the gateway. This reduces the potential for a manipulator-in-the-middle attack to exploit vulnerabilities in the security architecture of gateways. Cloud Connectors can forward data to and from sensors but cannot decrypt the sensor data.

- During manufacturing, each sensor is assigned a unique 256 bit asymmetric encryption key, generated by a tamper-proof 140-2 Level 3 certified hardware security module.
- Cloud Connector includes a Secure Element (SE) for hardware Root of Trust.
- The public part of the asymmetric key is exchanged with Disruptive Technologies cloud via encrypted channels.
- In addition to the keys assigned during manufacturing, the sensor and cloud also hold a unique SecureDataShot™ session key.
- Sensor data is encrypted using symmetric AES-128 encryption/decryption in CCM-mode.
- Cloud Connectors are provisioned with Transport Layer Security (TLS) certificates to establish a secure connection between the Cloud Connector and the cloud.

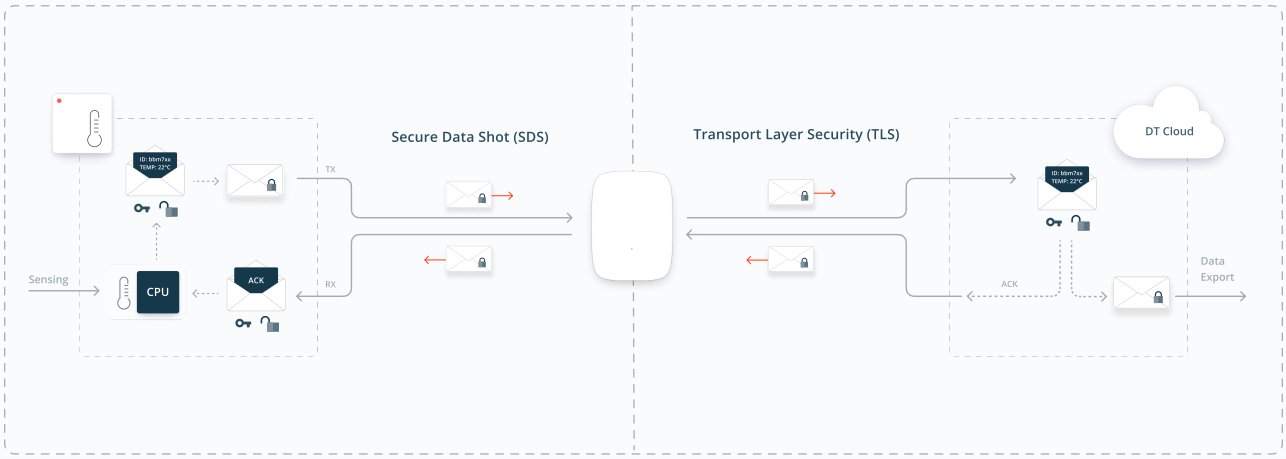


Disruptive Technologies Research AS © 2026

Cellular Communication (optional)

Cellular-enabled Cloud Connectors ship with a pre-configured internal SIM card that enables them to relay data from sensors to the cloud using 4G/LTE cellular network technology. As soon as it is powered on, the Cloud Connector will automatically connect to a cellular network in the area. The connection status, signal strength and other relevant parameters can be viewed in DT Studio or through the APIs.


Currently, mobile networks in North America and Europe are supported.

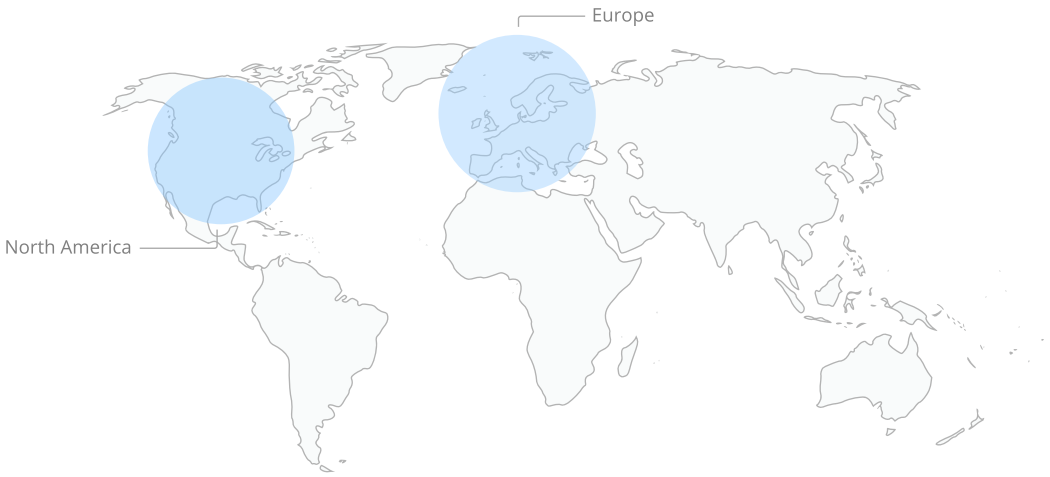

Connect anywhere with eSIM and seamless roaming

Disruptive Technologies partners with the best Mobile Virtual Network Operators (MVNO) in the world to deliver seamless connectivity. Through MVNOs, the Cloud Connector has access to multiple mobile network operators and their wireless network infrastructure.

Once powered, it will search for and establish a connection with a cellular network in the area. This process typically takes a couple of minutes. After that, data will stream seamlessly to the Cloud without any setup or configuration.

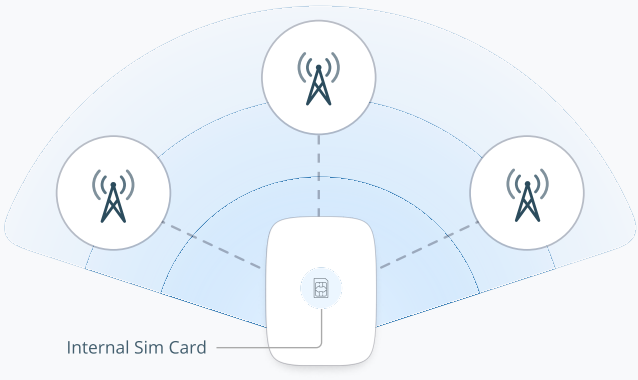

Cloud Connector

Seamless roaming between mobile network operators

Disruptive Technologies Research AS © 2026

Technical Specification

Sensor Wireless Communication

Radio Protocol	SecureDataShot™		
Radio Frequency	**EU:** 868 MHz SRD band	**US:** 915 MHz ISM band	**APAC:** 920 MHz ISM band
Transmit Power	< 100 mW		
Wireless Range	See sensor specifications for more detail.		

Cellular Communication

Communication Standard	**EU:** Cat 1 LTE FDD B1/3/7/8/20/28	**US:** Cat M1 LTE FDD B2/B4/B5/B12/B13 B25/B26/B66/B85	**APAC:** not applicable
Transmit Power	**EU:** Power Class 3 (23dBm±2dB) for LTE FDD bands	**US:** Power Class 5 (21dBm±1.5dB) for LTE FDD bands	**APAC:** not applicable

Operating & Storage Conditions

Operating Conditions	**Temperature:** 0 to 50°C (32 - 120°F) **Humidity:** 10 to 90% relative humidity (non condensing)
Storage Conditions	**Temperature:** 0 to 70°C (32 - 158°F) **Humidity:** 10 to 90% relative humidity (non condensing)

Power Supply & Consumption

Power Supply	5V DC @ 2A	
Plug Type	**Type:** Barrel - OD: 5.5mm ID: 2.1mm	**Polarity:** Positive polarity
Power Consumption	Average < 3W[1]	

(1): The average power consumption of the Cloud Connector will vary depending on whether Ethernet or Cellular mode is used.

Certification & Compliance

	EU: CE, UKCA	**US:** FCC, ISED, UL Contains FCC ID: 2ATFX-102545 Contains FCC ID: ZMOMA510GL Contains IC: 25087-102545 Contains IC: 21374-MA510GL UL Certified, File No: E489020	**APAC:** RCM, IMDA

Disruptive Technologies Research AS © 2026


Technical Specifications

EN12830 Compliance (only compliant with Cloud Connector EU Cellular and EN12830 sensors)

Accuracy Class	0.5 in the range -30°C to 55°C
Software Verification Level	Class III Type B (according to WELMEC 7.2) (EN12830:2018-10)
Test Report Number	ATP-MUC K-P-TS-26-200

Mechanical Properties

Size	153 x 114 x 30 mm | 6 x 4.5 x 1.2 inches
Weight	200 grams | 7 oz
Material	Polycarbonate (PC)
Ingress protection	IP20
Mounting method	Screws or adhesive (wall mount)

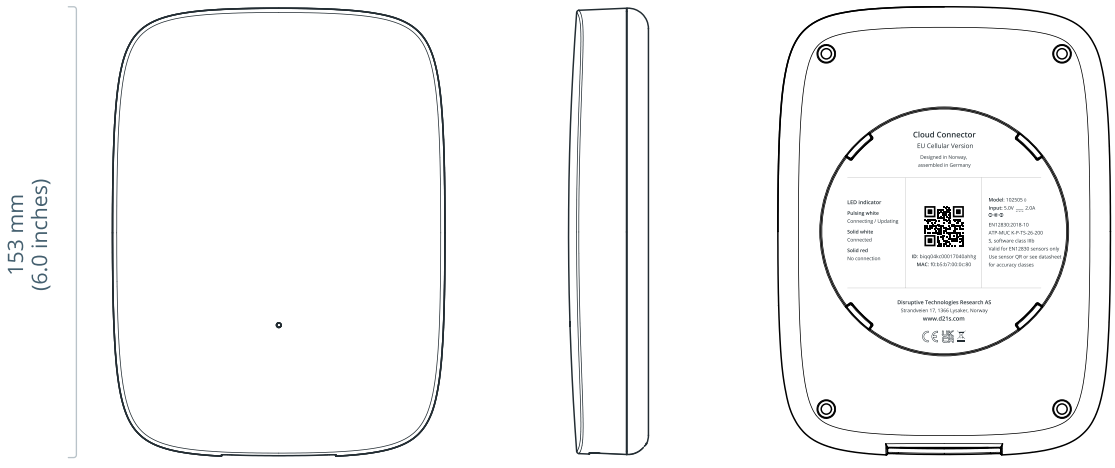

Regulatory Marking
(EU version)

Disruptive Technologies Research AS © 2026

Installation Guidelines

1 Connecting to power

Use the provided power supply to power the Cloud Connector.

2 Connecting to the Cloud


If the device has a cellular modem, it will automatically start connecting to the cloud service. If not, plug in an ethernet cable to establish a connection.

3 Observe the Status Indicator

Pulsing White
Connecting / updating, this can take up to a few minutes.


Solid White
Connected to the internet and fully operational.

Solid Red
Not connected, visit d21s.com/help for troubleshooting.

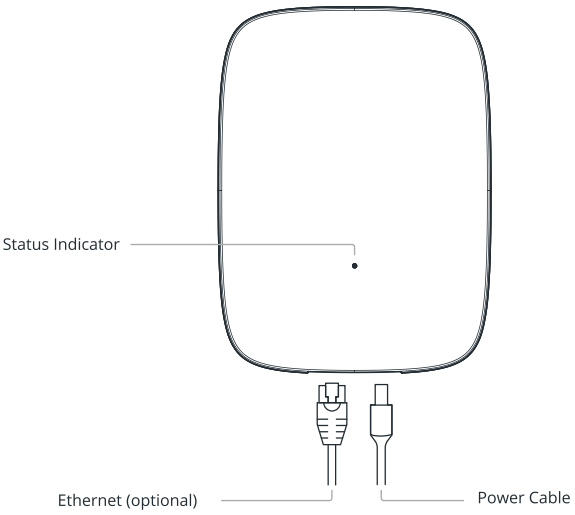


Installation Guidelines

Wall or Ceiling Installation




Secure the mounting bracket to the wall with screws.

If mounted below 2 meters (6.5 feet), the adhesive can be used alone.



The Cloud Connector attaches to the bracket with a friction bayonet mount.




Align the slots and move the Cloud Connector onto the bracket.



Turn the Cloud Connector 45° degrees to secure it in place and connect the power cable.


Drop Ceiling Installation

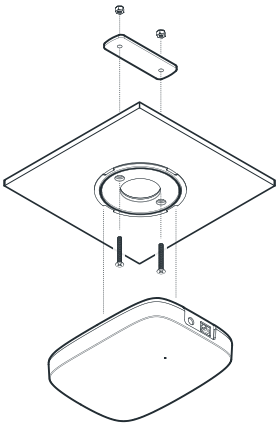

Remove the tile from the ceiling to perform the installation.

The mounting bracket is attached to the tile using the provided backing plate with two screws and nuts.


The Cloud Connector attaches to the bracket with a friction bayonet mount.

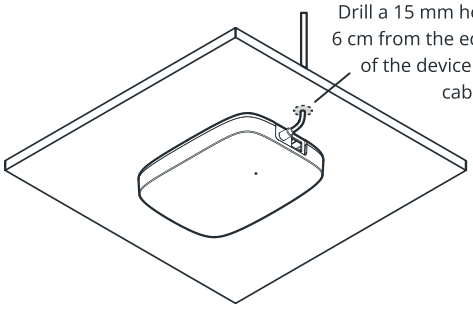


Drill a 15 mm hole, 6 cm from the edge of the device for cables.

Disruptive Technologies Research AS © 2026


In the box

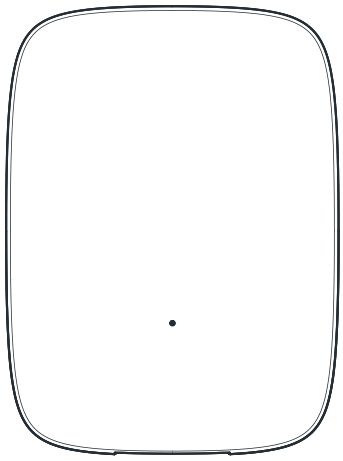

Cloud Connector



Mounting bracket with
adhesive backing

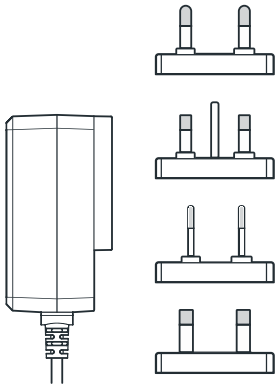


Power supply
+ regional plugs


Cabel length: 2.5 m / 8.2 feet




Safety & Use leaflet with
installation instructions



Drop ceiling bracket
+ screws and nuts



Wall screws
+ wall plugs



Ethernet cable

(Included with the Ethernet Only
version of the Cloud Connector)

Disruptive Technologies Research AS © 2026

Revision History

Revision 1.0	**Change:** Initial release **Date:** November 1st, 2022
Revision 1.1	**Change:** Added UL Certification **Date:** January 19th, 2023
Revision 1.2	**Change:** Added ingress protection **Date:** May 10th, 2023
Revision 1.3	**Change:** Added overview and updated document design **Date:** February 9th, 2024
Revision 1.4	**Change:** Added APAC variant **Date:** October 1st, 2026

Disclaimer: The right is reserved to make changes at any time. Disruptive Technologies Research AS, including its affiliates, agents, employees, and all persons acting on its or their behalf, disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. All parameters in datasheet are expected performance and not guaranteed min or max performance.